

THE STRONGEST SUCTION POWER

ONDA LINE


Stainless steel central vacuum cleaners with cyclonic filtration





MODEL		Onda 150	Onda 300	Onda 350	Onda 400
ARTICLE		VAC550	VAC63A	VAC63AB	VAC690B
Air Power Max	W	555	633	633	696
Mq. Max		150	300	350	400
Inlet valves		5	9	9	15
mt. Max PIPES		50	80	80	120
Users		1	1	1	1
Suction/discharge connection	Ø mm	50	50	50	50
Protection class	IP	30	30	30	30
Power supply	V ac	230	230	230	230
Frequency	Hz	50	50	50	50
Nominal motor power	kW	1350	1750	1750	1650
Nominal absorption	A	5,86	7,95	7,95	7,17
Inlet valves power supply	V dc	12	12	12	12
Max. air flow rate	m³/h	205	211	211	225
Max. depression	mbar	245	344	344	320
Filtration class		M	M	M	M
Filter surface area	cm²	5360	5360	5360	5360
*Dust container capacity	l	17,17	17,17	29,55	29,55
Air outlet silencer Ø 50 mm		SI	SI	SI	SI

THE STRONGEST SUCTION POWER


DIMENSIONS AND TECHNICAL DATA

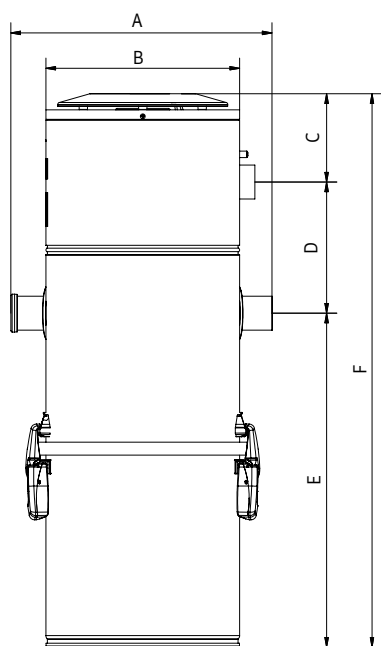

ONDA 150/300

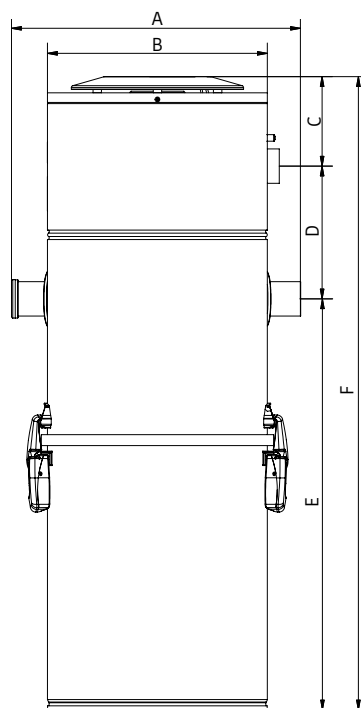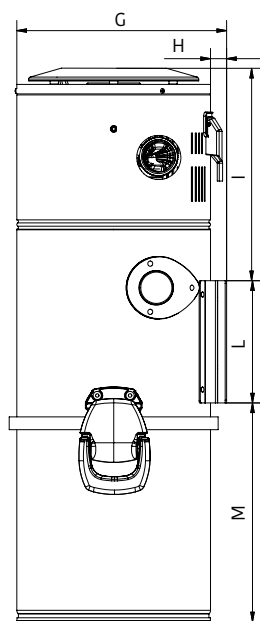

ONDA 350/400

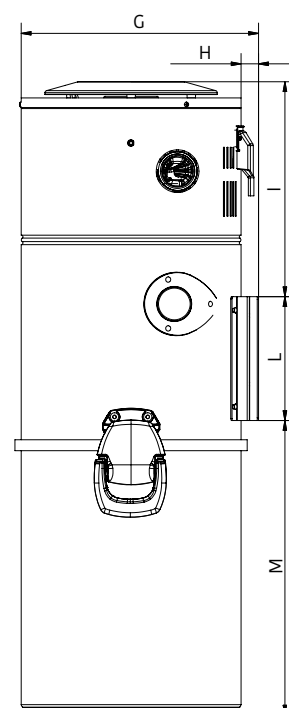

MODEL	Onda 150	Onda 300	Onda 350	Onda 400
ARTICLE	VAC550	VAC63A	VAC63AB	VAC690B
Measure A	385	385	420	420
Measure B $\varnothing$	285	285	320	320
Measure C	130	130	130	130
Measure D	193	193	193	193
Measure E	492	492	597	597
Measure F	815	815	920	920
Measure G	309	309	345	345
Measure H	25	25	25	25
Measure I	313	313	312	312
Measure L	180	180	180	180
Measure M	322	322	428	428

THE STRONGEST SUCTION POWER

AURA LINE


Stainless steel central vacuum cleaners with microfibre bag filtration





MODEL		Aura 150	Aura 300	Aura 350	Aura 400
ARTICLE		VAC55AU	VAC63M	VAC63MB	VAC69AUB
Air Power Max	W	555	633	633	696
Mq. Max		150	300	350	400
Inlet valves		5	9	9	15
mt. Max PIPES		50	80	80	120
Users		1	1	1	1
Suction/discharge connection	Ø mm	50	50	50	50
Protection class	IP	30	30	30	30
Power supply	V ac	230	230	230	230
Frequency	Hz	50	50	50	50
Nominal motor power	kW	1350	1750	1750	1650
Nominal absorption	A	5,86	7,95	7,95	7,17
Inlet valves power supply	V dc	12	12	12	12
Max. air flow rate	m³/h	205	211	211	225
Max. depression	mbar	245	344	344	320
Filtration class		M	M	M	M
Filter surface area	cm²	3100	3100	3100	3100
*Dust container capacity	l	17,17	17,17	29,55	29,55
*Filter bag capacity	l	18	18	18	18
Air outlet silencer Ø 50 mm		SI	SI	SI	SI

THE STRONGEST SUCTION POWER


DIMENSIONS AND TECHNICAL DATA

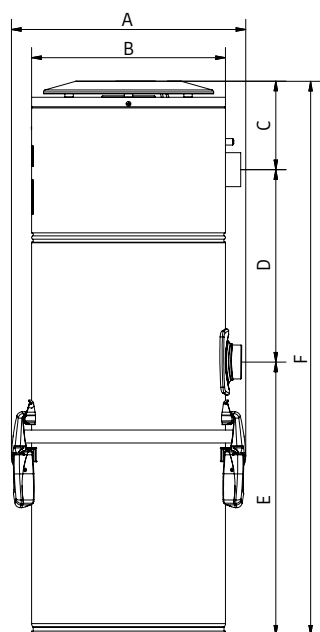

AURA 150/300

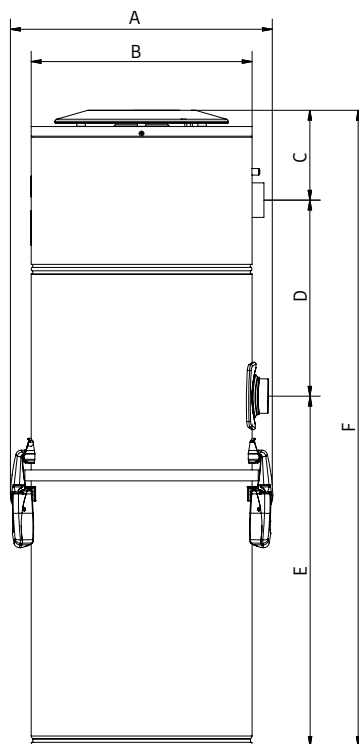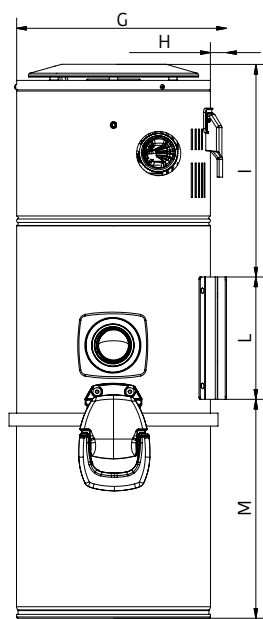

AURA 350/400

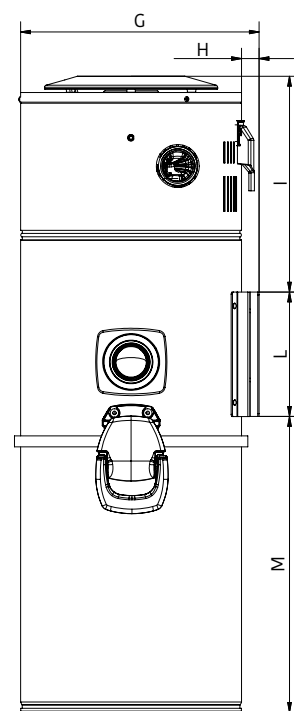

MODEL	Aura 150	Aura 300	Aura 350	Aura 400
ARTICLE	VAC55AU	VAC63M	VAC63MB	VAC69AUB
Measure A	345	345	379	379
Measure B $\emptyset$	285	285	320	320
Measure C	130	130	130	130
Measure D	283	283	284	284
Measure E	402	402	507	507
Measure F	815	815	920	920
Measure G	309	309	345	345
Measure H	25	25	25	25
Measure I	313	313	312	312
Measure L	180	180	180	180
Measure M	322	322	428	428